



## 2INCH WSP-BT200

## 3INCH WSP-BT300



Auto cutting

Auto cutting

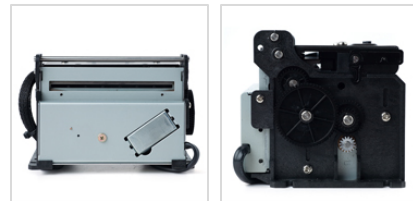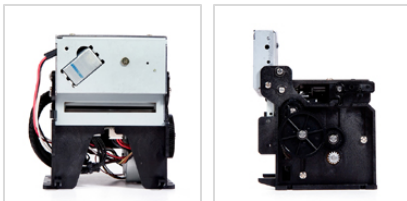

### Features

- Very silent printing thru direct thermal printing method
- High speed (150mm/sec)
- UART interface.
- Auto cutting.
- Support text and graphic printing.
- Support bit-image (logo) download.
- Easier paper loading by CLAMSHELL design.
- Easier maintenance with self-diagnostics.

### Applications

POS system, Kitchen printer, Electronic scale, EFT-POS, Measuring equipment, Lottery Warehousing and Distribution, Point of sales, Hospitality, Gaming and Healthcare.

### Specification

Model	BT200	BT300
Printing method	Direct thermal line printing	
Characters per line	42cpl (MAX)	64cpl (MAX)
Characters size	Eng : 9*24 dots, 12*24dots Kor : 16*24 dots, [24*24 dots]	
Optional Characters	Simplified/Traditional Chinese, Arabic, Cyrillic, Russian, Turkish, Greek, Japanese, Persian, Latin9 and Others upon request.	
Resolution	203 dpi, 8 dots/mm	
Print width	2-inch (56mm, 488dots)	3-inch (72mm, 576dots)
Printing speed	150 mm/sec (MAX)	150 mm/sec (MAX)
Dimensions (mm)	99.8 x 87.1 x 86.3 (111.5)	119.8 x 87.3 x 80.8(111.5)
Weight	533g	619g
Interface	• UART(RS-232C)	
Paper supplied	Thermal roll paper (60-0.5mm wide)	Thermal roll paper (80±0.5mm wide)
	Paper thickness : 60±5µm	
Barcodes	1-dimension:Code128, EAN 128, Code39, I2/5, Code93, UPC, EAN, KAN, JAN, CODABAR 2-dimension:PDF417, QR Code, DATA Matrix	
Driver	Microsoft Windows XP / VISTA / 7 , Windows CE, Linux, Android OS driver compatible	
H/W Spec.	MCU : 32 bits RISC, FLASH : 4Mbytes, RAM : 8MBytes	
Input power	24VDC, MAX 3A	

